

 ICOM

VHF P25 CONVENTIONAL & TRUNKED TRANSCEIVER

IC-F9511HT

# High Power Mobile for the First Responder!



AES/DES  
option

Rugged  
MIL-STD 810

IP54

DIGITAL

P25 Conventional  
& Trunking

AES/DES  
Encryption (Option)

Enhanced  
Vocoder Ready

110W Output  
Power

512 Channels  
128 Zone

Full Dot-matrix  
LCD



Photo includes optional SP-30.

High-Power

**110W**



# High POWER MOBILE FOR THE FIRST RESPONDER!

Ready for : P25 conventional,  
P25 trunking and  
analog conventional.  
All in one radio!

High-Power **110W**

VHF P25 CONVENTIONAL &  
TRUNKED TRANSCEIVER

## IC-F9511HT

### P25 Conventional & Trunking Features



#### P25 VHF Conventional and Trunking

The IC-F9511HT comes with P25 VHF conventional and trunking capabilities. You can assign individual channels to analog conventional, P25 conventional or P25 trunking, all within one radio.

#### Interoperability

The IC-F9511HT conforms to standard specifications for TIA/EIA -102, CAAB, Digital C4FM Transceiver Performance Recommendations. Provides interoperability with other brand P25 equipment for public safety applications.

#### Digital/Analog mixed mode operation

The mixed mode operation allows you to detect and receive both analog FM and P25 digital modes and to transmit either mode depending on programming.

#### Individual ID and talkgroup ID

The IC-F9511HT has a 100 individual ID and 250 talkgroup ID memories. Use the display to visually select the person or group you're going to call.

#### Optional AES/DES encryption

The IC-F9511HT provides AES and/or DES encryption for secure conversation with the optional UT-125 AES/DES encryption unit or UT-128 DES encryption unit.

#### OTAR (Over-the-Air-Rekeying)

The IC-F9511HT supports P25 OTAR for changing encryption keys over the air.

#### Enhanced vocoder ready

Using the DVSI's AMBE+2™ vocoder, the IC-F9511HT is enhanced vocoder ready.





### 110W of powerful RF output

A full 110W of output power is available for reliable long distance communication. A large heat sink provides effective cooling mechanism allowing continuous duty cycle operation (20% duty cycle transmission).

### Compact "letter size" RF unit

While the IC-F9511HT provides 110W of RF output, the RF (main) unit dimensions are only 175 (W) × 60 (H) × 279 (D) mm (6 $\frac{7}{8}$  × 2 $\frac{3}{8}$  × 10 $\frac{31}{32}$  in), so the RF unit can be fit into a "letter size" console box.

### IP54 dust and water resistance

The controller and RF unit have dust-protection and splash resistance, equivalent to IP54.

### Dot matrix, multi-function LCD

With a high contrast dot matrix display, upper and lower case characters can be easily distinguished. The display shows 12 characters by 2 lines. LCD backlight is standard.



Internal clock setting example

### Self-grounding mic, HM-148G

The supplied HM-148G self-grounding microphone has a mechanism for self grounding where a grounding wire is no longer required.

### Tactical group function

The tactical group function allows you to copy memory channels to the tactical zone and temporarily regroup memory channels. Using the optional zone copy cable, memory channels in the tactical zone can be transferred from a master radio to other radios.

### Abundant scanning functions

The dual priority scan monitors two primary channels alternately, while scanning other channels. The mode dependent scan function automatically changes the scan list according to the operating channel setting. The talk back function with timer beep, TX channel and cancel channel settings allow you to preset the transmission channel when you push the PTT button during a scanning operation or cancel the scanning.

### Radio stun/kill and Power-on password function

The radio stun/kill function\* disables a lost or stolen radio over the air, eliminating security threats from undesired listeners. The power-on password prevents unauthorized people from turning on the radio.

\* P25 digital mode only.

### Optional external speaker SP-30

Newly designed external speaker, SP-30 offers 15W\* (typ.) of high level audio with the IC-F9511HT for improved operation in noisy environments.

\* Rated input of the SP-30 is 20W.

### Other features

- Wide frequency coverage (136–174MHz)
- FM wide/narrow channel spacing\*<sup>1</sup>
- Built-in audio compander\*<sup>1</sup>
- Built-in inversion type voice scrambler\*<sup>1</sup>
- NTIA VHF specification compliant
- Talk around function
- DTMF autodial\*<sup>1</sup>
- Microphone hanger action (On hook scan and off hook monitor)
- 2-Tone encoder and decoder\*<sup>1</sup> and MDC 1200 compatible\*<sup>1</sup> (Available in future)

\*<sup>1</sup> Analog mode only

### Separate controller

The controller and speaker are separated from the RF unit for flexible installation. A 5m (16.4ft) separation cable is attached to the controller and optional separation cable length is selectable from 1.9m (6.2ft), 3m (9.8ft) and 8m (26.2ft).

### 512 memory channels, 128 zones

Up to 512 memory channels can be divided into 128 memory zones, allowing you flexible channel and communication group management. The CTCSS and DTCS encoder and decoder\* are also built-in to set up your own talk groups. \* Analog mode only.

### 9-pin external speaker connector

The IC-F9511HT has a 9-pin speaker connector with a 15W (typ.) audio amplifier for connecting the SP-30 external speaker, horn honk and ignition sensing line, etc.. When an external loud speaker is connected, the RX speaker function allows you to relay the received audio over the loud speaker.

### Programmable accessory connector

The IC-F9511HT has a D-SUB 25-pin ACC connector for connecting external devices. It has reserved pins for programming to input operating channels, turn on/off functions and output received audio.



Optional external speaker, SP-30



**SPECIFICATIONS**

**GENERAL**

- Frequency range : 136-174MHz
- Number of channels : Max. 512 channels/128 zones
- Channel spacing : 15/30kHz (analog) 12.5kHz (digital)
- PLL channel step : 2.5kHz, 3.125kHz
- Antenna impedance : 50Ω (SO-239)
- Operating Temp. range : -30°C to +60°C ; -22°F to +140°F
- Power supply requirement : 13.6V DC nominal
- Current drain (approx) :
  - Tx High (110W) 22.0A
  - Rx Max. audio 3.0A
  - Stand-by 400mA
- Dimensions (W×H×D) (projections not included) :
  - RF unit 175×60×279 mm ; 6<sup>7</sup>/<sub>8</sub> × 2<sup>3</sup>/<sub>8</sub> × 10<sup>31</sup>/<sub>32</sub> in
  - Controller 178×48×50 mm ; 7 × 1<sup>7</sup>/<sub>8</sub> × 1<sup>31</sup>/<sub>32</sub> in
- Weight (approx.) : 4.1kg; 9.0lb
  - With controller & cable 4.7kg; 10.4lb

Measurements made in accordance with TIA-102 (Digital), TIA-603B (Wide/narrow). All stated specifications are subject to change without notice or obligation.

**TRANSMITTER**

- Output power (approx) : 110W
- Max. frequency deviation : ±5.0/2.5kHz (Wide/Narrow) Maximum pattern ±2.85kHz (Digital)
- Frequency error : ±1.0ppm
- Spurious emissions : 70dB min.
- Adjacent channel power : 70/60dB min. (Wide/Narrow) 67dB min. (Digital)
- FM hum and noise : 48/45dB typ. (Wide/Narrow)
- Audio harmonic distortion: 3% typ. (40% deviation)
- Ext. microphone impedance: 600Ω (8-pin modular)

**Applicable U.S. Military Specifications & IP Rating**

Standard	MIL 810 F	
	Method	Procedure
Low Pressure	500.4	I, II
High Temperature	501.4	I, II
Low Temperature	502.4	I, II
Temperature Shock	503.4	I
Solar Radiation	505.4	I
Rain	506.4	I, III
Humidity	507.4	-
Salt Fog	509.4	-
Dust	510.4	I
Vibration	514.5	I
Shock	516.5	I, IV

Also meets equivalent MIL-STD-810-C, -D and -E.

Ingress Protection Standard	
Dust & Water	IP54 (Dust-protection and water resistant)

**RECEIVER**

- Sensitivity :
  - Analog 0.25μV typ. (at 12dB SINAD)
  - Digital 0.25μV typ. (at 5% BER)
- Squelch sensitivity : 0.25μV typ. (at threshold)
- Adjacent Ch. selectivity :
  - Analog (TIA/EIA603B) 81/53dB typ. (Wide/narrow)
  - (TIA/EIA603) 85/77dB typ. (Wide/narrow)
  - Digital 63dB typ.
- Spurious response : 85dB min.
- Intermodulation : 78dB typ.
- Hum and noise ratio : 55/51dB typ. (Wide/Narrow) 52dB typ. (Digital)
- Audio output power : 15W typ. at 3% distortion with a 4Ω load (with external speaker)

**Supplied Accessories**

- Hand microphone, HM-148G
- Separation cable, 5m (16.4ft)
- Microphone hanger
- Mounting bracket kit for main unit and controller
- Fuse
- Cable with fuse holder
- Controller unit
- DC power cable
- Key assign stickers
- Mounting bracket kit for main unit and controller
- Socket terminals
- Speaker is an option.

**OPTIONS**

Some options may not be available in some countries. Please ask your dealer for details.

**HAND MICROPHONES**



- HM-152 : Regular hand microphone.
- HM-152T : DTMF microphone.
- HM-148G : Heavy duty microphone. Self-grounding type. Same as supplied.
- HM-148T : Heavy duty microphone with DTMF keypad. Self-grounding type.

**SEPARATION CABLES**



- OPC-609 : 1.9m; 6.2ft separation cable.
- OPC-607 : 3.0m; 9.8ft separation cable.
- OPC-726 : 5.0m; 16.4ft separation cable. Same as supplied.
- OPC-608 : 8.0m; 26.2ft separation cable.

**DESKTOP MICROPHONE SM-25**




Convenient for dispatching, equipped with monitor switch.

**EXTERNAL SPEAKER SP-30**



20W rated input power (40W max. input).

**ENCRYPTION UNITS**

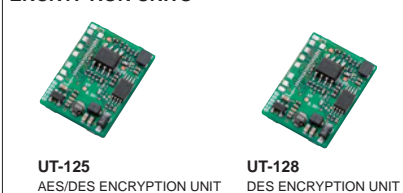

- UT-125 : Provides AES and DES encryption capabilities.
- UT-128 : Provides DES encryption capabilities.

**ZONE COPY CABLES**



- OPC-1532 : Mobile to mobile zone copy cable.
- OPC-1871 : Mobile to handheld zone copy cable.

Icom, Icom Inc. and the Icom logo are registered trademarks of Icom Incorporated (Japan) in the United States, the United Kingdom, Germany, France, Spain, Russia and/or other countries. AMBE+2 is a trademark and property of Digital Voice Systems Inc. All other trademarks are the properties of their respective holders.

**Icom Inc.**

1-1-32, Kami-minami, Hirano-ku, Osaka 547-0003, Japan Phone: +81 (06) 6793 5302 Fax: +81 (06) 6793 0013 URL: <http://www.icom.co.jp/world/index.html>

**Count on us!**

**Icom America Inc.**

2380 116th Avenue NE, Bellevue, WA 98004, U.S.A. Phone: +1 (425) 454-8155 Fax: +1 (425) 454-1509 E-mail: [sales@icomamerica.com](mailto:sales@icomamerica.com) URL: <http://www.icomamerica.com>

**Icom New Zealand**

146A Harris Road, East Tamaki, Auckland, New Zealand Phone: +64 (09) 274 4062 Fax: +64 (09) 274 4708 E-mail: [inquiries@icom.co.nz](mailto:inquiries@icom.co.nz) URL: <http://www.icom.co.nz>

**Icom (UK) Ltd.**

Unit 9, Sea St., Herne Bay, Kent, CT6 8LD, U.K. Phone: +44 (0)1227 741741 Fax: +44 (0)1227 741742 E-mail: [info@icomuk.co.uk](mailto:info@icomuk.co.uk) URL: <http://www.icomuk.co.uk>

**Asia Icom Inc.**

6F No. 68, Sec. 1 Cheng-Teh Road, Taipei, Taiwan, R.O.C. Phone: +886 (02) 2559 1899 Fax: +886 (02) 2559 1874 E-mail: [sales@asia-icom.com](mailto:sales@asia-icom.com) URL: <http://www.asia-icom.com>

Your local distributor/dealer:

**Icom Canada**

Glenwood Centre #150-6185 Highway 17, Delta, B.C., V4K 5B8, Canada Phone: +1 (604) 952-4266 Fax: +1 (604) 952-0090 E-mail: [info@icomcanada.com](mailto:info@icomcanada.com) URL: <http://www.icomcanada.com>

**Icom (Europe) GmbH**

Communication Equipment Himmelgeister Str. 100, D-40225 Düsseldorf, Germany Phone: +49 (0)211 346047 Fax: +49 (0)211 333639 E-mail: [info@icom-europe.com](mailto:info@icom-europe.com) URL: <http://www.icomeurope.com>

**Icom France s.a.s.**

Zac de la Plaine, 1 Rue Brindejonc des Moulins, BP 45804, 31505 Toulouse Cedex 5, France Phone: +33 (5) 61 36 03 03 Fax: +33 (5) 61 36 03 00 E-mail: [icom@icom-france.com](mailto:icom@icom-france.com) URL: <http://www.icom-france.com>

**Beijing Icom Ltd.**

10C07, Long Silver Mansion, No.88, Yong Ding Road, Haidian District, Beijing, 100039, China Phone: +86 (010) 5889 5391/5392/5393 Fax: +86 (010) 5889 5395 E-mail: [bjicom@bjicom.com](mailto:bjicom@bjicom.com) URL: <http://www.bjicom.com>

**Icom (Australia) Pty. Ltd.**

Unit 1 / 103 Garden Road, Clayton, VIC 3168 Australia Phone: +61 (03) 9549 7500 Fax: +61 (03) 9549 7505 E-mail: [sales@icom.net.au](mailto:sales@icom.net.au) URL: <http://www.icom.net.au>

**Icom Spain S.L.**

Ctra. Rubi, No. 88 "Edificio Can Castanyer" Bajos A 08174, Sant Cugat del Valles, Barcelona, Spain Phone: +34 (93) 590 26 70 Fax: +34 (93) 589 04 46 E-mail: [icom@icomspain.com](mailto:icom@icomspain.com) URL: <http://www.icomspain.com>

**Icom Polska**

81-850 Sopot, ul. 3 Maja 54, Poland Phone: +48 (58) 550 7135 Fax: +48 (58) 551 0484 E-mail: [icompolkska@icompolkska.com.pl](mailto:icompolkska@icompolkska.com.pl) URL: <http://www.icompolkska.com.pl>